


NOTE:

1. BECK DRIVE ROTATION IS ADJUSTABLE BETWEEN 60° AND 100° BY CALIBRATION OF THE ELECTRONIC COMPONENTS.

ALL DIMENSIONS ARE IN INCHES AND [MM] UNLESS OTHERWISE SPECIFIED.
 THREADS AND TAPPED HOLES ARE SPECIFIED AS UNIFIED THREAD SIZES ONLY.
 CONDUIT PIPE THREADS PER AMERICAN NATIONAL STANDARD TAPER PIPE THREADS (N.P.T.)

TOLERANCES:

OUTLINE DIMENSIONS ±1/4 [±6]
 MOUNTING DIMENSIONS ±1/16 [±2]

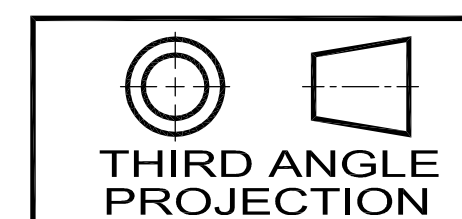

18-0430-01o

HAROLD BECK & SONS INC

NEWTOWN INDUSTRIAL COMMONS NEWTOWN, PENNSYLVANIA 18940 USA

TITLE: **OUTLINE DIMENSIONS
 BECK 11-430 DRIVE
 ORIENTATION OPTION "A"**

DRAWN: DWK 10-30-07	SCALE: NONE	DRAWING NO: 18-0430-01o	REV: H
CHECKED: DMS 11-6-07		SHEET NO. 1 OF 2	
APPROVED: JHM 11-7-07			

BECK DRIVE MODEL NO.	TORQUE	APPROX. WEIGHT	OUTPUT SHAFT DIA.	CRANKARM SUPPLIED AS STANDARD			MAXIMUM OVERHUNG LOAD LBS. (KGS.)
				CRANKARM PART NO.	CRANKARM RADIUS (ADJUSTABLE)	CRANKARM LENGTH "D" DIM.	
11-430	2900, 5200 LB.-FT. 3932, 7050 Nm	790 LBS. 358 KGS.	3 15/16 [100]	14-8022-42	6-1/2 TO 10-1/2 [165 TO 267]	14 3/8 [365]	20,000 LBS. (9072 KGS.)
				14-8022-44	9" TO 15" [229 TO 381]	19" [483]	15,000 LBS. (6804 KGS.)

SIZE: **D**