



REVISION			
LTR.	DESCRIPTION	DATE	APPR.

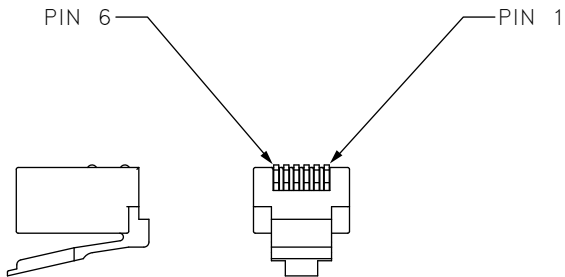

**RJ-11 6-PIN PLUG**

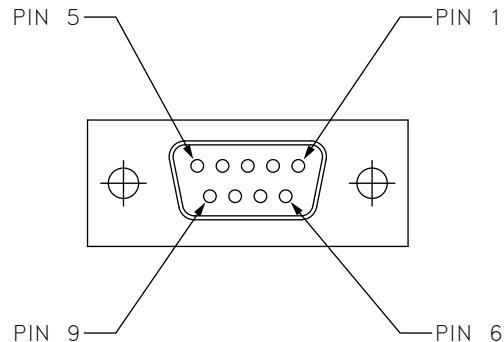

**FEMALE DB-9**

<u>RJ-11 6-PIN PLUG</u> PIN NO.	<u>DB-9</u> PIN NO.
1	6
2	2
3	9
4	5
5	3
6	4

SIZE:  
**B**

<b>UNLESS OTHERWISE SPECIFIED</b>		<b>HAROLD BECK &amp; SONS INC</b>	
<small>ALL DIMENSIONS ARE IN INCHES DIMENSIONS AND TOLERANCES PER ANSI Y14.5M DIMENSIONAL TOLERANCES: FRACTIONAL: ±1/64 DECIMAL: .XX = ± .010 .XXX = ± .005 .XXXX = ± .0005 ANGLES: X° = ± 1° CHAMFERS: X° = ± 5° RADI: .040 MAX. RADIUS WHERE A DIAMETER IS BORED OR TURNED TO A SHOULDER GEARING: AGMA QUALITY LEVEL 8 THREADS: SCREW: CLASS 2A - EXTERNAL CLASS 2B - INTERNAL PIPE: AMERICAN NATIONAL STANDARD MACHINED SURFACE FINISH: 250 RMS MACHINED DIAMETERS ON THE SAME CENTERLINE TO BE CONCENTRIC WITHIN .005 T.I.R. REMOVE ALL BURRS AND SHARP EDGES. MAXIMUM .020 RADIUS OR CHAMFER</small>		<small>NEWTOWN INDUSTRIAL COMMONS NEWTOWN, PENNSYLVANIA 18940 USA</small>	
<small>TITLE:</small> <b>DIAGRAM, CONNECTOR PIN OUT, RJ-11 6-PIN PLUG TO FEMALE DB-9</b>		<small>DRAWN:</small> <b>DWK 3-31-04</b>	<small>SCALE:</small> <b>2:1</b>
<small>CHECKED:</small> <b>FWB 4-12-04</b>		<small>DRAWING NO.:</small> <b>17-0000-01</b>	<small>REV.:</small> <b>-</b>
<small>APPROVED:</small> <b>JHM 4-13-04</b>		<small>SHEET NO. 1 OF 1</small>	