


OUTPUT SIGNAL OPTIONS


| | |
|--------------------------|--------|
| 4 TO 20 MA (EE=+) | |
| LOAD | FIGURE |
| 0 TO 500 Ω | A |
| 250 TO 800 Ω | B |
| 1 TO 5 VOLTS (DD=+) | |
| LOAD | FIGURE |
| 12K Ω MIN (400uA MAX) | C |

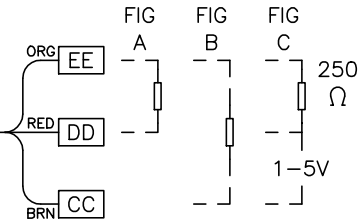

- NOTES:
1. REMOVE JUMPER JA TO PREVENT HANDSWITCH INITIATED MOTION

TERMINAL CONNECTIONS FOR REMOTE CONTROL:

| | |
|------|------|
| CW | C-M |
| CCW | C-N |
| STOP | NONE |



17-5506-100 A

SIZE:
A

THIS DOCUMENT IS A COPY AND IS NOT THE SOURCE DOCUMENT. INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE. THE INFORMATION CONTAINED HEREIN IS COPYRIGHTED BY HAROLD BECK AND SONS, INC. CHANGES TO THE DOCUMENT ARE PROHIBITED. CONTACT A BECK SALES ENGINEER IF A CERTIFIED DRAWING IS REQUIRED.

HAROLD BECK & SONS INC

NEWTOWN INDUSTRIAL COMMONS NEWTOWN, PENNSYLVANIA 18940 USA

TITLE:
WIRING DIAGRAM GROUP 11-1X6/2X6/3X6/406/416/466
240 VOLT 0 AUX SWITCHES 4-20 MA CPS
CW/CCW

| | | | |
|---------------------------|----------------|-----------------------------------|------------------|
| DRAWN: CHH 10-12-07 | SCALE: NONE | DRAWING NO: 17-5506-100 | REV: A |
| CHECKED: GMD 10/15/07 | | SHEET NO. 1 OF 1 | |
| APPROVED: JHM 10/16/07 | | | |